

MARK	CONTENT OF AMENDMENT	DATE	DRAW

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter"JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietry to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent. COPY RIGHT @ 2021 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

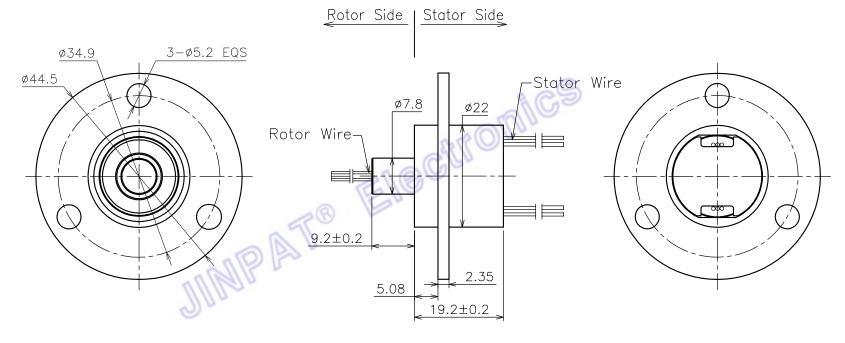




P
JINPAT
www.slipring.cn

MODEL LPC-06A Customer Outline Drawing TITLE code TOL UNLESS SPECIFIED DESIGN DATE 2021.04.08 UNIT mm LCC LINEAR
0--18 ±0.1
>18--80 ±0.15
>80--250 ±0.2
ANGLE
x' ±0.5 SCALE CHECKED LML DATE 2021.04.08 1:1 1/2 PROJ. REV. A0 PAGE

MARK	CONTENT OF AMENDMENT	DATE	DRAW

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter"JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietry to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent. COPY RIGHT @ 2021 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

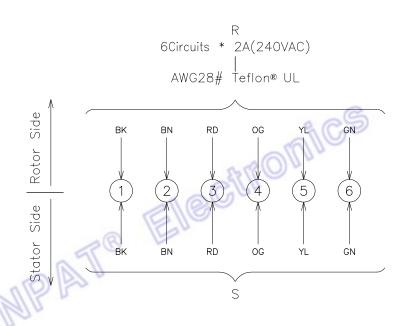

Electronic & Electric			Mechanical		
Circuits	Total	6 CKT	Working Speed	0~300rpm	
Circuits	Detail	6x2A	Contact Material	Gold to Gold	
Rating	Voltage	0~240V AC/DC	Housing Material	Engineering plastics	
Dielectric Strength		≥500VAC@50Hz(P) ≥100VAC@50Hz(S)	Lead Wire Length	Stator:250±5mm Rotor:250±5mm	
		≥100MΩ@500VDC(P) ≥10MΩ@100VDC(S)	Dynamic Resistance Fluctuation Value	≤35mΩ	
Environment Working Temperature -20°C~+60°C Working Humidity ≤60%RH		Remarks			
		-20°C~+60°C	Application	/	
		≤60%RH	Other	/	
li li	Р	IP40	Note: "P" stands fo	r power, "S" stands for signal.	



MODEL	LPC-06A					
Customer code			TITLE	Wiring Diagram		
UNIT	mm	TOL UNLESS SPECIFIED	DESIGN	LCC	DATE	2021.04.08
SCALE	1:1	LINEAR 018 ±0.1 >1880 ±0.15 >80250 ±0.2	CHECKED	LML	DATE	2021.04.08
PROJ.	\$	ANGLE x' ±0.5	REV.	AO	PAGE	2/2