
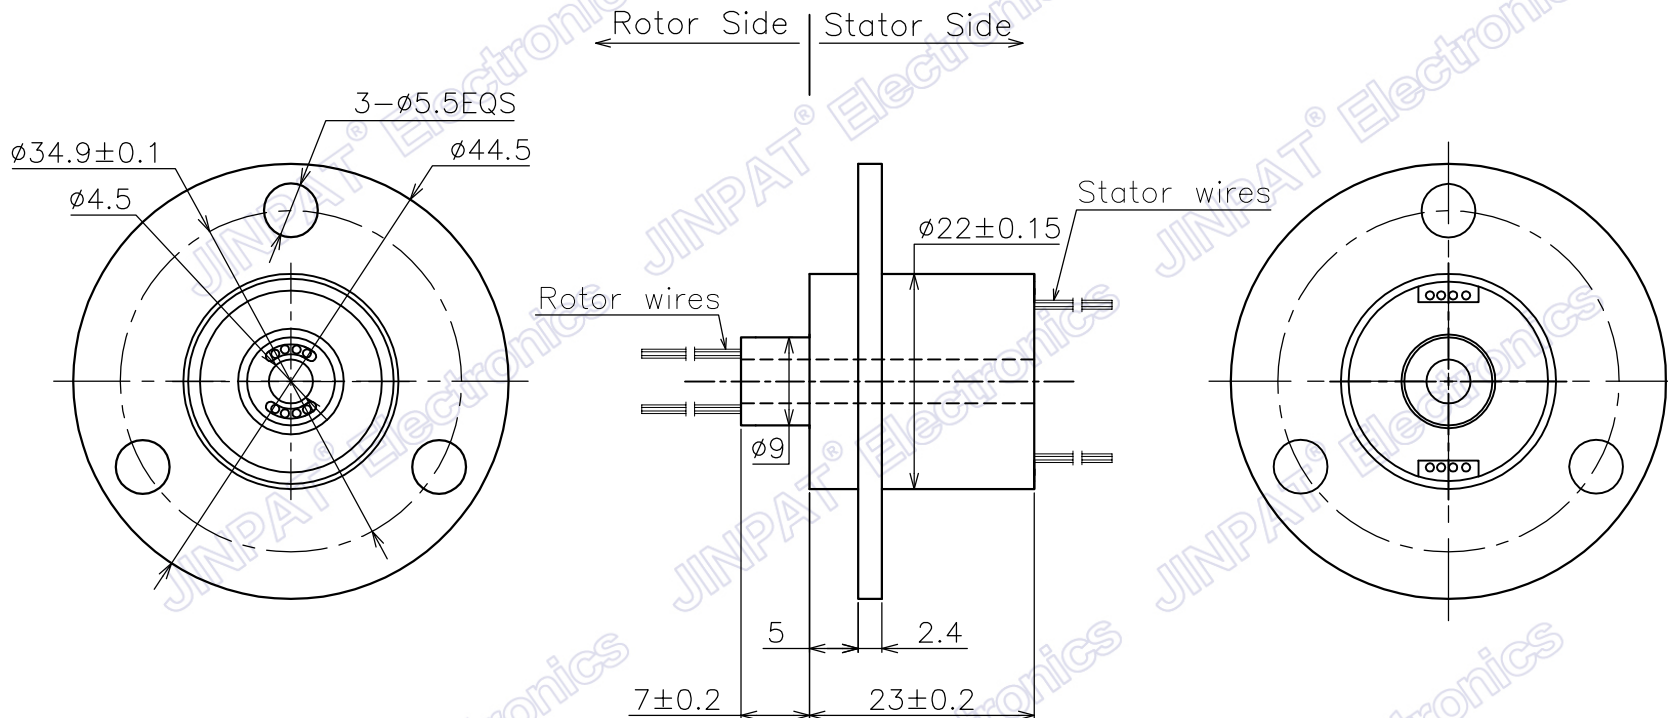




MARK	CONTENT OF AMENDMENT	DATE	DRAW

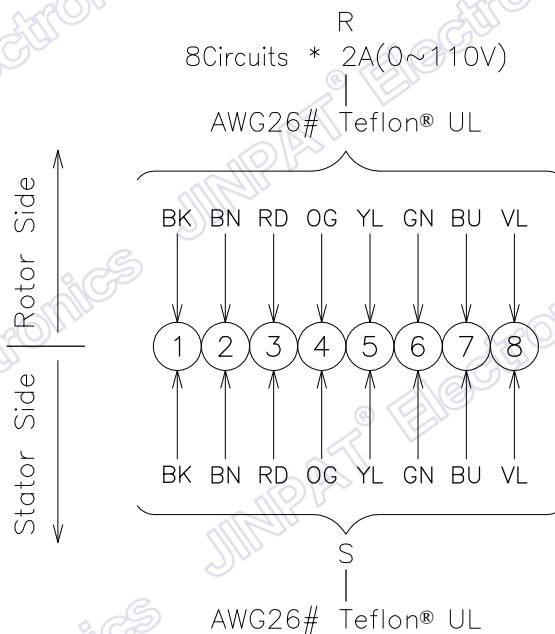
This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets propriety to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.
COPY RIGHT © 2022 JINPAT ELECTRONICS Co., Ltd (ShenZhen).



 JINPAT www.slipring.cn	MODEL	LPC-08YS					
	Customer code		TITLE	Outline Drawing			
	UNIT	mm	TOL UNLESS SPECIFIED	DESIGN	ZYH	DATE	2022.04.02
	SCALE	1:1	LINEAR 0-18 ±0.1 >18--80 ±0.15 >80--250 ±0.2 ANGLE ° ±0.5°	CHECKED	LML	DATE	2022.04.02
PROJ.			REV.	AO	PAGE	1/2	

MARK	CONTENT OF AMENDMENT	DATE	DRAW

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.
COPY RIGHT © 2022 JINPAT ELECTRONICS Co., Ltd (ShenZhen).



Electronic & Electric		Mechanical	
Circuits	Total	8 CKT	Working Speed
	Detail	8x2A	(360 degree forward and reverse)
Rating Voltage	240V AC/DC	Contact Material	Gold to Gold
Dielectric Strength	≥500VAC@50Hz	Housing Material	Engineering plastics
Insulation Resistance	≥100MΩ@500VDC	Lead Wire Length	Stator:250±5mm Rotor:250±5mm
Environment		Electrical Noise	≤35mΩ
Working Temperature	-20°C~+60°C	Remarks	
Working Humidity	≤60%RH	Application	/
IP	IP40	life expectancy	Typ.10 million revolutions(at room temperature) depends on installation position



MODEL		LPC-08YS			
Customer code		TITLE	Wiring Diagram		
UNIT	mm	TOL UNLESS SPECIFIED	DESIGN	ZYH	DATE
SCALE	1:1	LINEAR 0--18 ±0.1 >18--80 ±0.15 >80--250 ±0.2	CHECKED	LML	DATE
PROJ.		ANGLE x° ±0.5°	REV.	AO	PAGE
					2/2